SHENKAI

## Reference standards: API 16A,GB/T 20174

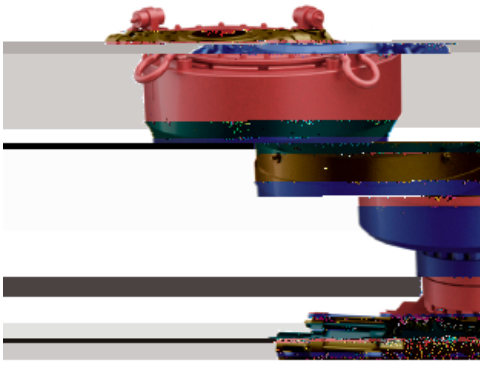

Product Applicability: It is applicable to Northeast and in Jiang of China and Russia which environment is extremely cold

### Product Features

- The BOP Stack should be insulated against freezing to maintain good sealing performance of all seals in the BOP
- Blowout preventer have pipeline internally, except steam inlet device no additional equipment, easy to operate
- Steam conduct heat directly to the BOP internal, heat conduction and heat radiation

| ℃ | | |
|---|---|---|
| Lowest applicable temperature | Rated Pressure Class | Sulfur resistance class |

| 技 参数 | |
|---|---|
| Nominal diameter | 179.4-679.5mm (7 1/16"-26 3/4") |
| Rated working pressure: ram preventer | 13.8-138Mpa (2000-20000psi) |
| Rated working pressure of hydraulic control system | 20.7Mpa (3000psi) |
| Recommended operating pressure | 10.35MPa (1500psi) |
| Metal material temperature grade | T-75/250 |
| Sulfur resistance level | NACE MR0175 |
| Performance Level | PR2 |